

Lecture 12

Classification

Readings: Zelterman, 2015, Chapter 10.1-10.4; Izenman, 2008 Chapter 8.1-8.4; ISLR, 2021 Chapter 9; Johnson & Wichern 2007, Chapter 11

DSA 8070 Multivariate Analysis

Whitney Huang
Clemson University

Classification



Background
Binary Linear Classification
Support Vector Machines

12.1

Notes

Agenda

- 1 Background
- 2 Binary Linear Classification
- 3 Support Vector Machines

Classification



Background
Binary Linear Classification
Support Vector Machines

12.2

Notes

Classification

- **Data:** $\{\mathbf{X}_i, Y_i\}_{i=1}^n$,
where Y_i is the class information for the i_{th} observation $\Rightarrow Y$ is a qualitative variable
- **Classification** aims to classify a new observation (or several new observations) into one of those classes

Quantity of interest: $P(Y = k_{th} \text{ category} | \mathbf{X} = \mathbf{x})$
- In this lecture we will focus on **binary linear classification**

Classification




Background
Binary Linear Classification
Support Vector Machines

12.3

Notes

Toy Example

Wish to classify a new observation $x_i = (x_{1i}, x_{2i})$, denoted by (*), into one of the two groups (class 1 or class 2)

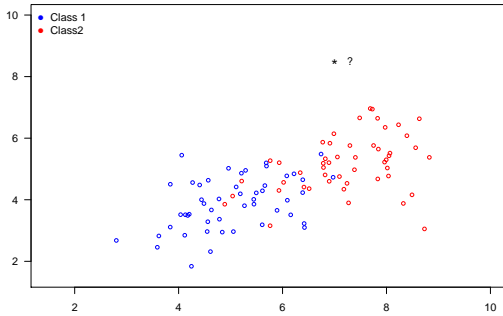

Classification
CLEMSON UNIVERSITY
 Background
 Binary Linear Classification
 Support Vector Machines
 12.4

Notes


Toy Example Cont'd

We can compute the distances from this new observation $x = (x_1, x_2)$ to the groups, for example,

$$d_1 = \sqrt{(x_1 - \mu_{11})^2 + (x_2 - \mu_{12})^2},$$

$$d_2 = \sqrt{(x_1 - \mu_{21})^2 + (x_2 - \mu_{22})^2}.$$

We can assign x to the group with the smallest distance

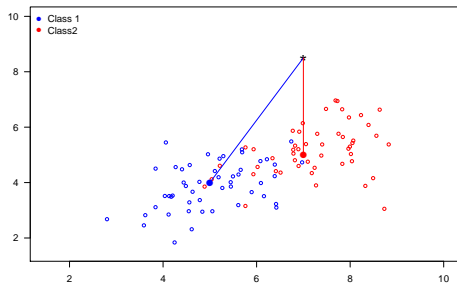


Classification
CLEMSON UNIVERSITY
 Background
 Binary Linear Classification
 Support Vector Machines
 12.5

Notes

Variance Corrected Distance

In this one-dimensional example, $d_1 = |x - \mu_1| > |x - \mu_2|$. Does that mean x is "closer" to group 2 (red) than group 1 (blue)?

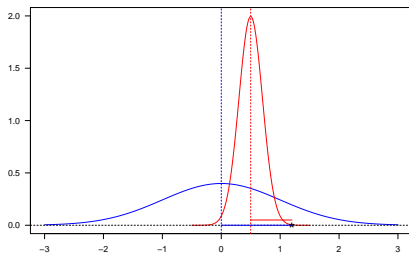

We should take the "spread" of each group into account. $\hat{d}_1 = |x - \mu_1|/\sigma_1 < \hat{d}_2 = |x - \mu_2|/\sigma_2$

Classification
CLEMSON UNIVERSITY
 Background
 Binary Linear Classification
 Support Vector Machines
 12.6

Notes

General Covariance Adjusted Distance: Mahalanobis Distance

The Mahalanobis distance [Mahalanobis, 1936] is a measure of the distance between a point x and a multivariate distribution of X :

$$D_M(x) = \sqrt{(x - \mu)^T \Sigma^{-1} (x - \mu)},$$

where μ is the mean vector and Σ is the variance-covariance matrix of X

One can use the Mahalanobis distance, by computing the Mahalanobis distance between an observations x_i and the "center" of the k_{th} population μ_k , to carry out classification

Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
 Support Vector Machines

12.7

Notes

Binary Classification with Multivariate Normal Populations

Assume $X_1 \sim \text{MVN}(\mu_1, \Sigma)$, $X_2 \sim \text{MVN}(\mu_2, \Sigma)$, that is, $\Sigma_1 = \Sigma_2 = \Sigma$

- Maximum Likelihood of group membership:

$$\text{Group 1 if } \ell(x, \mu_1, \Sigma) > \ell(x, \mu_2, \Sigma)$$

- Linear Discriminant Function:

$$\text{Group 1 if } (\mu_1 - \mu_2)^T \Sigma^{-1} x - \frac{1}{2} (\mu_1 - \mu_2)^T \Sigma^{-1} (\mu_1 + \mu_2) > 0$$

- Minimize Mahalanobis distance:

$$\text{Group 1 if } (x - \mu_1)^T \Sigma^{-1} (x - \mu_1) < (x - \mu_2)^T \Sigma^{-1} (x - \mu_2)$$

All the criteria above are equivalent in terms of classification

Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
 Support Vector Machines

12.8

Notes

Priors and Misclassification Costs

In addition to the observed characteristics of units $\{x_i\}_{i=1}^n$, other considerations of classification rules are:

- Prior probability:

If one population is more prevalent than the other, chances are higher that a new unit came from the larger population. Stronger evidence would be needed to allocate the unit to the population with the smaller prior probability.

- Costs of misclassification:

It may be more costly to misclassify a seriously ill subject as healthy than to misclassify a healthy subject as being ill.

Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
 Support Vector Machines

12.9

Notes


Classification Regions and Misclassifications

- The probability of misclassifying an object into π_2 when it belongs in π_1 is

$$P(2|1) = \mathbb{P}(\mathbf{X} \in \mathcal{R}_2 | \pi_1)$$

- The probability of misclassifying an object into π_1 when it belongs in π_2 is

$$P(1|2) = \mathbb{P}(\mathbf{X} \in \mathcal{R}_1 | \pi_2)$$



Source: Figure 11.3 from Applied Multivariate Statistical Analysis, 6th Ed (Johnson & Wichern). Visualization is for $p = 1$ variable.

Classification
CLEMSON UNIVERSITY

Background
Binary Linear Classification
Support Vector Machines

12.10

Notes

Probability and Expected Cost of Misclassification

Let p_1 and p_2 denote the prior probabilities of π_1, π_2 , and $c(1|2), c(2|1)$ be the costs of misclassification:

- Then probabilities of the four possible outcomes are:

$$\mathbb{P}(\text{correctly classified as } \pi_1) = \mathbb{P}(\mathbf{X} \in \mathcal{R}_1 | \pi_1) \mathbb{P}(\pi_1) = P(1|1)p_1$$

$$\mathbb{P}(\text{incorrectly classified as } \pi_1) = \mathbb{P}(\mathbf{X} \in \mathcal{R}_1 | \pi_2) \mathbb{P}(\pi_2) = P(1|2)p_2$$

$$\mathbb{P}(\text{correctly classified as } \pi_2) = \mathbb{P}(\mathbf{X} \in \mathcal{R}_2 | \pi_2) \mathbb{P}(\pi_2) = P(2|2)p_2$$

$$\mathbb{P}(\text{incorrectly classified as } \pi_2) = \mathbb{P}(\mathbf{X} \in \mathcal{R}_2 | \pi_1) \mathbb{P}(\pi_1) = P(2|1)p_1$$

- Classification rules are often evaluated in terms of the **expected cost of misclassification (ECM)**:

$$ECM = c(2|1)P(2|1)p_1 + c(1|2)P(1|2)p_2,$$

and we seek rules that **minimize the ECM**

Classification
CLEMSON UNIVERSITY

Background
Binary Linear Classification
Support Vector Machines

12.11

Notes

Classification Rule and Special Cases of Minimum ECM Regions

The regions $\mathcal{R}_1, \mathcal{R}_2$ that minimize the ECM are defined by the values of \mathbf{x} for which

$$\mathcal{R}_1 : \frac{f_1(\mathbf{x})}{f_2(\mathbf{x})} > \left(\frac{c(1|2)}{c(2|1)} \right) \left(\frac{p_2}{p_1} \right)$$

$$\mathcal{R}_2 : \frac{f_1(\mathbf{x})}{f_2(\mathbf{x})} < \left(\frac{c(1|2)}{c(2|1)} \right) \left(\frac{p_2}{p_1} \right)$$

- if $p_1 = p_2 : \frac{f_1(\mathbf{x})}{f_2(\mathbf{x})} > \frac{c(1|2)}{c(2|1)} \Rightarrow \mathcal{R}_1$, otherwise \mathcal{R}_2
- if $c(1|2) = c(2|1) : \frac{f_1(\mathbf{x})}{f_2(\mathbf{x})} > \frac{p_2}{p_1} \Rightarrow \mathcal{R}_1$, otherwise \mathcal{R}_2
- if $c(1|2) = c(2|1)$ and $p_1 = p_2 : \frac{f_1(\mathbf{x})}{f_2(\mathbf{x})} > 1 \Rightarrow \mathcal{R}_1$, otherwise \mathcal{R}_2

Classification
CLEMSON UNIVERSITY


Background
Binary Linear Classification
Support Vector Machines

12.12

Notes

Example: Fisher's Iris Data

4 variables (sepal length and width and petal length and width), 3 species (setosa, versicolor, and virginica)

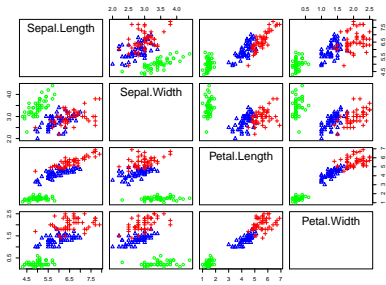

Task: Classify flowers into different species based on lengths and widths of sepal and petal

Classification
CLEMSON UNIVERSITY


Background
Binary Linear Classification
Support Vector Machines

12.13

Notes

Fisher's Iris Data Cont'd

Let's focus on the latter two classes (versicolor, and virginica)

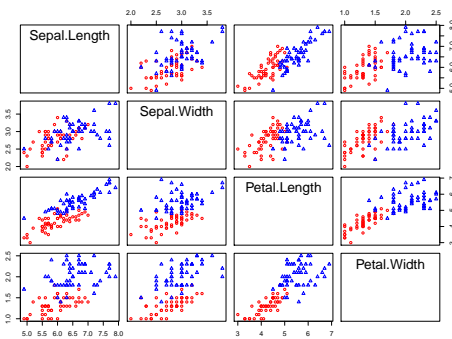

Classification
CLEMSON UNIVERSITY


Background
Binary Linear Classification
Support Vector Machines

12.14

Notes

Fisher's iris Data Cont'd

To further simplify the matter, let's focus on the first two PCs of X

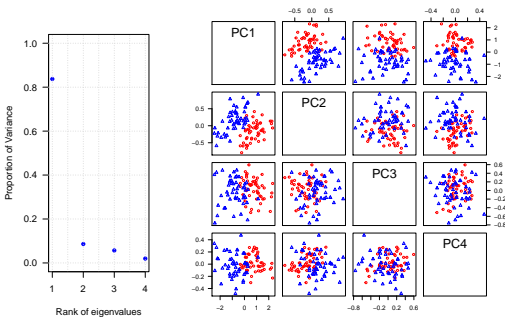

Classification
CLEMSON UNIVERSITY

Background
Binary Linear Classification
Support Vector Machines

12.15


Notes

Linear Discriminant Analysis

Main idea: Use Bayes rule to compute

$$P(Y = k | \mathbf{X} = \mathbf{x}) = \frac{P(Y = k)P(\mathbf{X} = \mathbf{x} | Y = k)}{P(\mathbf{X} = \mathbf{x})} = \frac{\pi_k f_k(\mathbf{x})}{\sum_{k=1}^K \pi_k f_k(\mathbf{x})}$$

Assuming $f_k(\mathbf{x}) \sim \text{MVN}(\boldsymbol{\mu}_k, \Sigma)$, $k = 1, \dots, K$ and use $\hat{\pi}_k = \frac{n_k}{n} \Rightarrow$ it turns out the resulting classifier is linear in \mathbf{x}

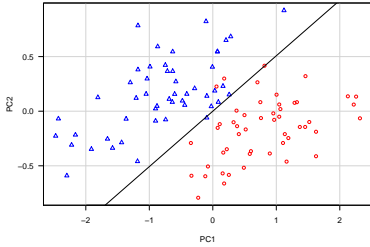

Classification

CLEMSON UNIVERSITY

Background


Binary Linear Classification

Support Vector Machines

12.16

Notes

Classification Performance Evaluation



```
fit.LDA
      versicolor virginica
versicolor      47         3
virginica       1         49
```

Misclassification rate: $\frac{3+1}{47+3+1+49} = 0.04$

Classification

CLEMSON UNIVERSITY

Background

Binary Linear Classification


Support Vector Machines

12.17

Notes

Logistic Regression Classifier

Main idea: Model the logit $\log\left(\frac{P(Y=1)}{1-P(Y=1)}\right)$ as a linear function in \mathbf{x} (PC1 and PC2 in this case)

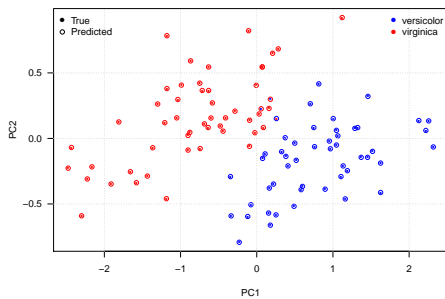

Classification

CLEMSON UNIVERSITY

Background


Binary Linear Classification

Support Vector Machines

12.18

Notes

Logistic Regression Classifier Cont'd



```

logisticPred
versicolor virginica
versicolor    48      2
virginica      1     49
    
```

Misclassification rate: $\frac{2+1}{48+2+1+49} = 0.03$

Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
 Support Vector Machines

12.19

Notes

Linear Discriminant Analysis Versus Logistic Regression

For a binary classification problem, one can show that both linear discriminant analysis (LDA) and logistic regression are **linear classifiers**. The difference is in how the parameters are estimated:

- Logistic regression uses the conditional likelihood based on $P(Y|X = x)$
- LDA uses the full likelihood based on multivariate normal assumption on X
- Despite these differences, in practice the results are often very similar

Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
 Support Vector Machines

12.20

Notes

Quadratic Discriminant Analysis

In linear discriminant analysis, we **assume** $\{f_k(x)\}_{k=1}^K$ are normal densities and $\Sigma_1 = \Sigma_2$, therefore we obtain a **linear classifier**.

What if $\Sigma_1 \neq \Sigma_2$? \Rightarrow we get **quadratic discriminant analysis**

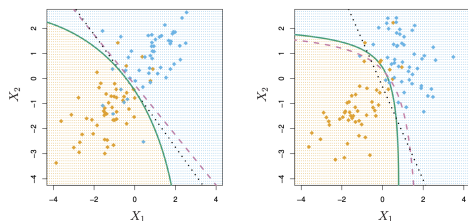


Figure courtesy of [An Introduction of Statistical Learning](#) by G. James et al. pp. 154

Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
 Support Vector Machines


12.21

Notes

An Algorithmic Approach to Classification

Find a **hyperplane** that "best" separates the classes in feature space

- what we mean by "separateness"?
- what is the feature space?

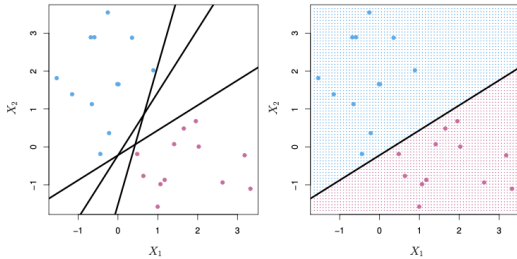

Classification
CLEMSON
 UNIVERSITY


Background
 Binary Linear Classification
Support Vector Machines

12.22

Notes

Maximal Margin Classifier

Main idea: among all separating hyperplanes, find the one that creates the biggest gap ("margin") between the two classes



doing so leads to the following optimization problem:

$$\begin{aligned} & \text{maximize}_{\beta_0, \beta_1, \beta_2} M \\ & \text{subject to } \sum_{j=1}^2 \beta_j^2 = 1, \\ & y_i(\beta_0 + \beta_1 x_{i1} + \beta_2 x_{i2}) \geq M, \\ & i = 1, \dots, n \end{aligned}$$

This problem can be solved efficiently using techniques from quadratic programming

Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
Support Vector Machines


12.23

Notes

Support Vector Classifier

- Sometimes the data can not be separated by a line
- data can be noisy which leads to unstable maximal-margin classifier

The **support vector classifier** maximizes a "soft" margin

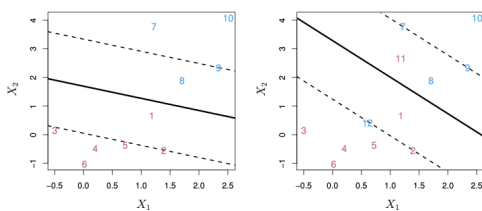


Classification
CLEMSON
 UNIVERSITY

Background
 Binary Linear Classification
Support Vector Machines

12.24

Notes

Beyond Linear Classifier

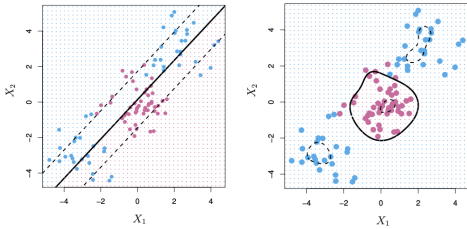

- A linear boundary can fail to separate classes
- Can expand the feature space by including transformations, e.g., $X_1^2, X_2^2, X_1X_2, \dots$ \Rightarrow gives non-linear decision boundaries in the original feature space
- However, polynomials basis can be unstable, a more general way to introduce non-linearities is through the use of kernels, e.g.,
$$f(\mathbf{x}) = \beta_0 + \sum_{i \in \mathcal{S}} \hat{\alpha}_i \exp(-\gamma \sum_{j=1}^p (x_j - x_{ij})^2)$$

Classification
CLEMSON UNIVERSITY
Background
Binary Linear Classification
Support Vector Machines
12.25

Notes

SVM Versus Logistic Regression (LR) and LDA

- When classes are (nearly) separable, SVM does better than LR and LDA
- Use LR to estimate class probabilities as SVM is a non-probabilistic classifier
- For nonlinear boundaries, kernel SVMs are popular

Classification
CLEMSON UNIVERSITY
Background
Binary Linear Classification
Support Vector Machines
12.26

Notes

Summary

In this lecture we learned about:

- Some classical classifiers for performing classification
- How to assess the efficacy of a classifier
- Support vector machines (SVMs)

R functions to know

- `lda/qda` from the MASS library
- `svm` from the e1071 library

In the next lecture, we will learn about [Cluster Analysis](#)

Classification
CLEMSON UNIVERSITY
Background
Binary Linear Classification
Support Vector Machines
12.27

Notes
